


Customer approval :

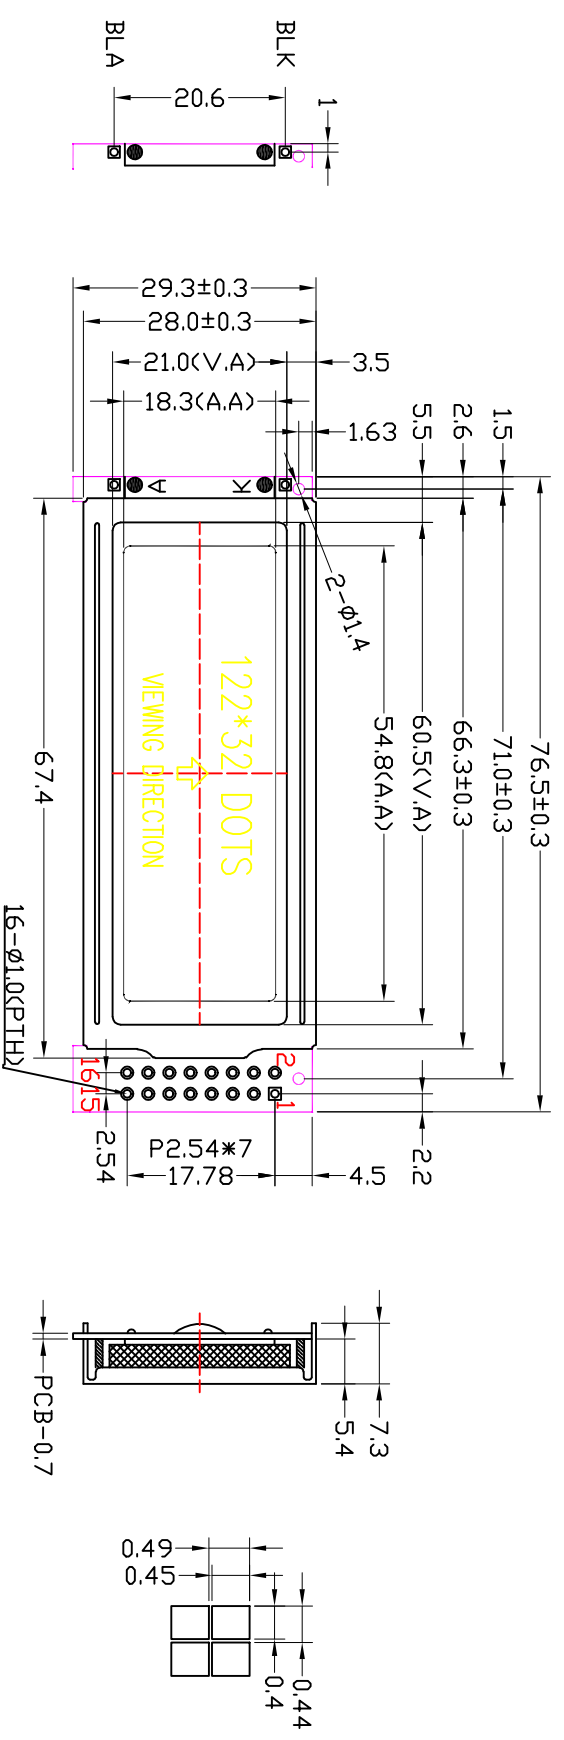


SPECIFICATION:

- 1). Driving: DUTY:1/32, BIAS:1/6, V0:4.7V, VDD:5.0V
- 2). Viewing angle: 6 0°CLOCK
- 3). Display mode: STN(Blue), Negative, Transmissive
- 4). Operating temp: 0°C~+50°C
- 5). Storage temp: -10°C~+60°C
- 6). Controller IC: SED1520 (or compatible)
- 7). Backlight: Edge(white), VLED=5.0V, ILED=120mA
- 8). Dimensions with mark “*” are important, with mark “()” are referenced
- 9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	~	16
VDD	VSS	V0	RST	E1	E2	R/W	RS	DB0	~	DB7

REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	GENERAL TOL:
A	First issue	05/28	模组型号	Francis	Luoxian	± 0.3
B			审批			
C			审批			
D			Liu			


深圳市三元晶科技有限公司
 Shenzhen TCC LCD Hi-Tech Co., Ltd

PAGE: 1 OF 1	UNIT: mm
PROJECTION 三角法	