


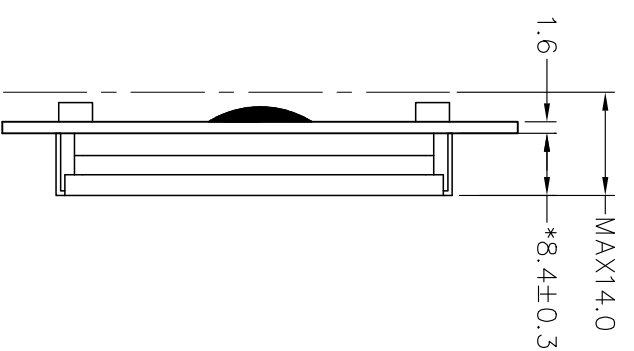


Customer approval :

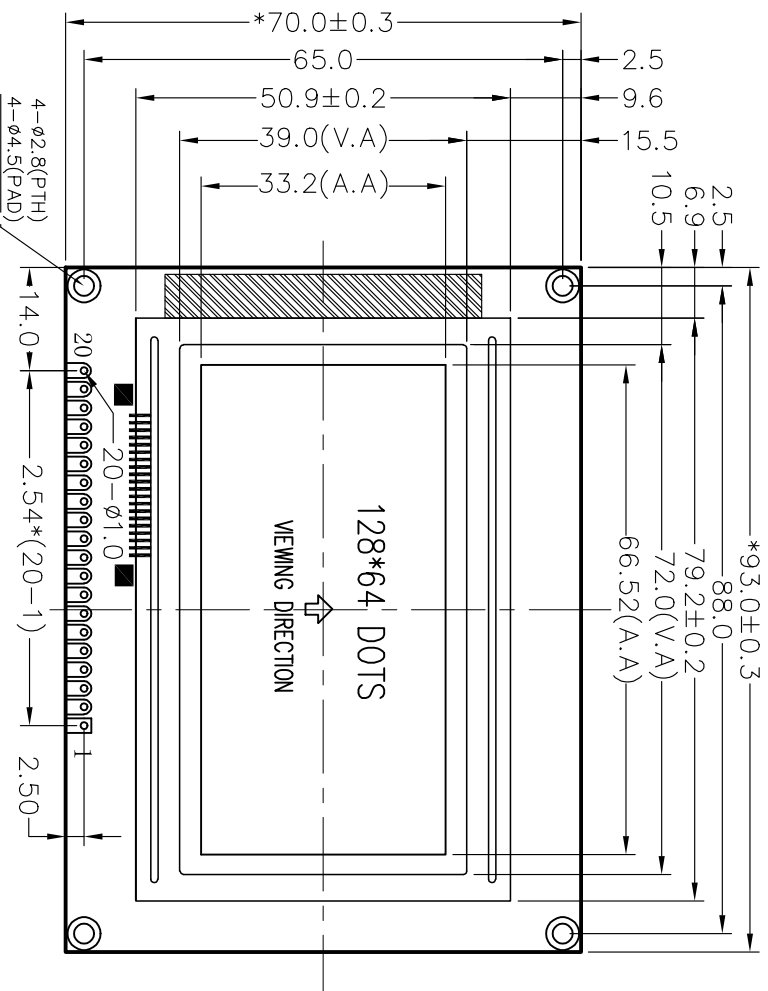

DOT SIZE
SCALE 10:1

并口接口定义

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	PSB	NC	/RST	Vout	BLA	BLK

PSB=H 并口模式
PSB=L 串口模式

串口接口定义

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	CS	SID	SCLK	NC	NC	NC	NC
CONNECTION	NC	NC	NC	NC	PSB	NC	/RST	Vout	BLA	BLK

- SPECIFICATION:
- 1). Driving: Duty:1/64, Bias:1/9, Vo: 4.9V, Vout:5.0or9.2V, Vdd:5.0V
 - 2). Viewing angle: 6 O'Clock
 - 3). Display mode: STN/Blue/Negative/Transmissive
 - 4). Operating temp: -10°C~+60°C
 - 5). Storage temp: -20°C~+70°C
 - 6). Controller IC: ST7920 (or compatible)
 - 7). Backlight: Edge(White), Vb1a:5.0V/Vb1k:0V Iled≤60mA
 - 8). Dimensions with mark "()" are important, with mark "()" are referenced
 - 9). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	TCCLCD HI- Tech Co., Ltd.			GENERAL TOL: ± 0.3
A			MODEL NO.	SYB12864K5V21-5C11BLN2R-BSNG	深圳市三元晶科技有限公司	
B			APPROVED BY	CHECKED BY	Luoxian	
C			DRAWING BY		2012/05/30	
D			PAGE: 1 OF 1	PROJECTION		UNIT: mm