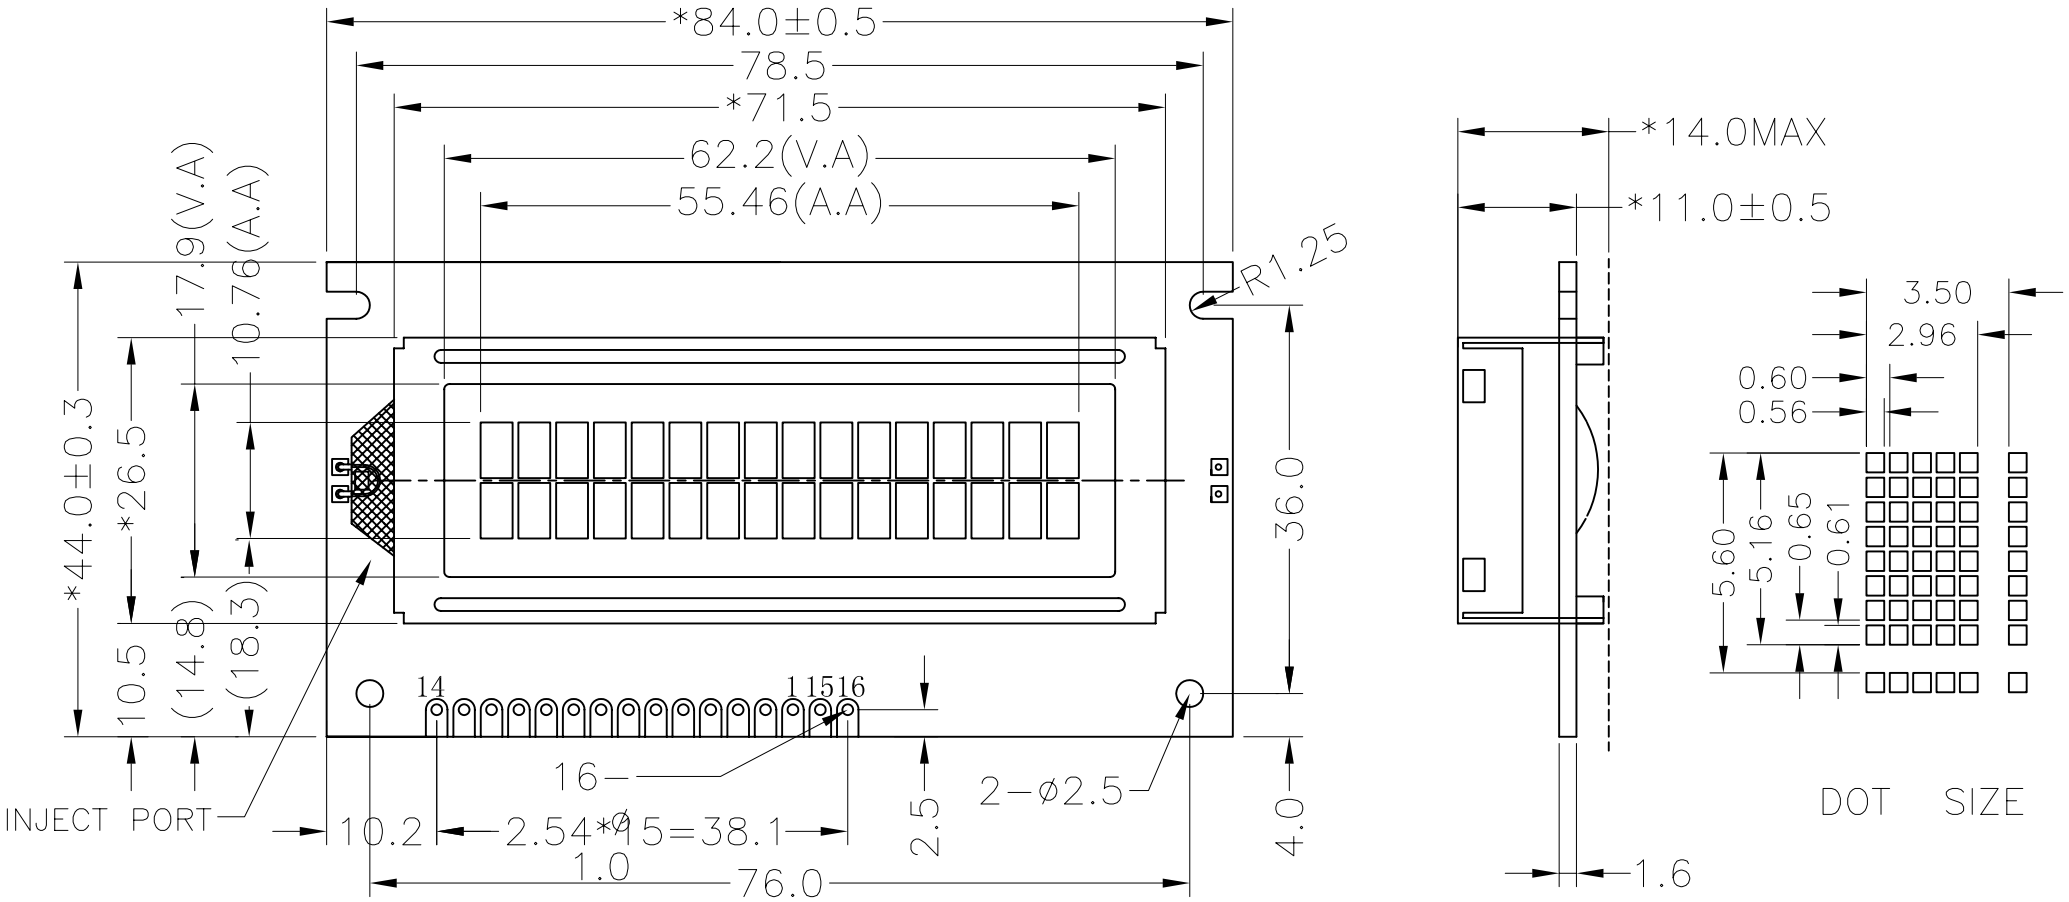

SPECIFICATION:

1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.5V
2). VIEWING DIRECTION: 6 O'CLOCK
3). Display mode: STN/Negative/Transmissive/Blue
4). Operating temp.:−20°C~+70°C
5). Storage temp.: −30°C~+80°C
6). Control IC: SPLC780D1−001−C(Or Compatible)
7). BACKLIGHT: EDGE,White
8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REV	REVISION RECORD	DATE
A0	First issue	11-19

深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co,. Ltd

DRAWING NO.	SYB1602C1V10-5C10BL-B5NG		GENERAL TOL:	±0.2
APPROVED BY	CHECKED BY	DRAWING BY	UNIT: mm	PAGE
		Jequil 2010/11/19		1/1