Customer approval :

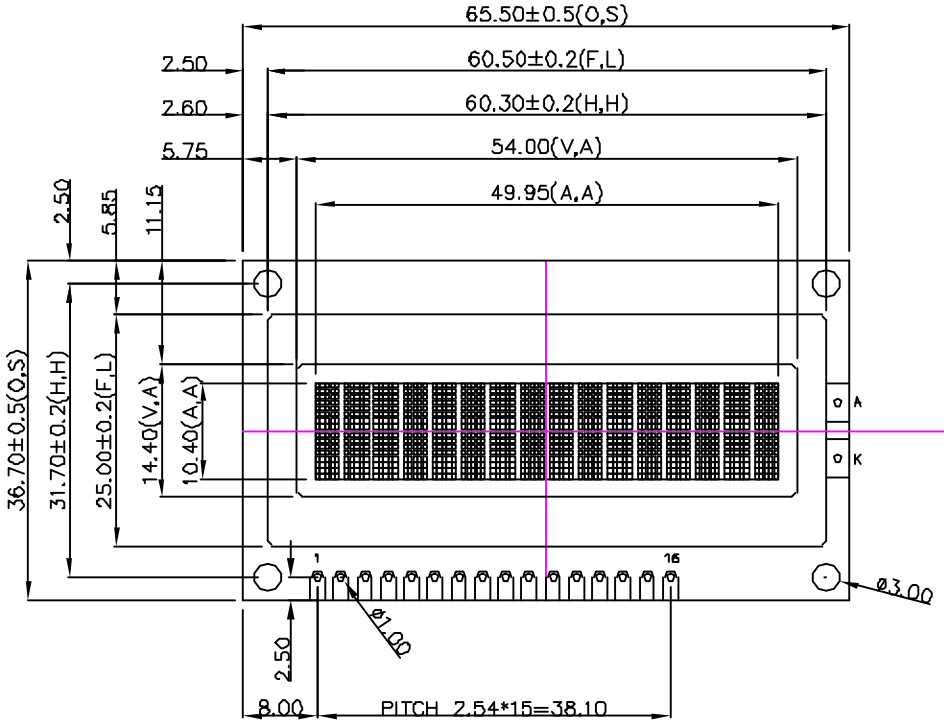

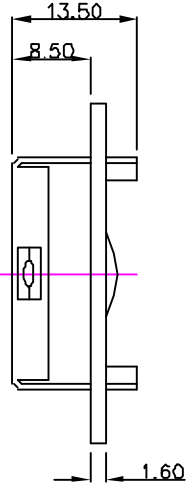



SPECIFICATION:

1). Driving: Duty:1/16,Bias:1/5,Vlcm=3.0V,Vlcd:4.5V
2). VIEWING DIRECTION: 6 O'CLOCK
3). Display mode:STN/Yellow-Green/Positive/Transflective
4). Operating temp.:0°C~+50°C
5). Storage temp.: -10°C~+60°C
6). Control IC: SPLC780D1(Or Compatible)
7). BACKLIGHT: Yellow-Green Array LED: 5.0V
8). DIMENSIONS WITH MARK "*" ARE IMPORTANT
WITH MARK "()" ARE REFERENCED
9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	NC	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REVISION RECORD	REV
First issue	A0

深圳市三元晶 科技有限公司
ShenZhen TCC LCD Hi-Tech Co,. Ltd

DRAWING NO.	SYB1602IV10-3C10YL1-B5NGH		GENERAL TOL:	± 0.2
APPROVED BY	CHECKED BY	DRAWING BY	UNIT: mm	PAGE
Liu		FC 2015.2.6		1/1