


Customer approval :

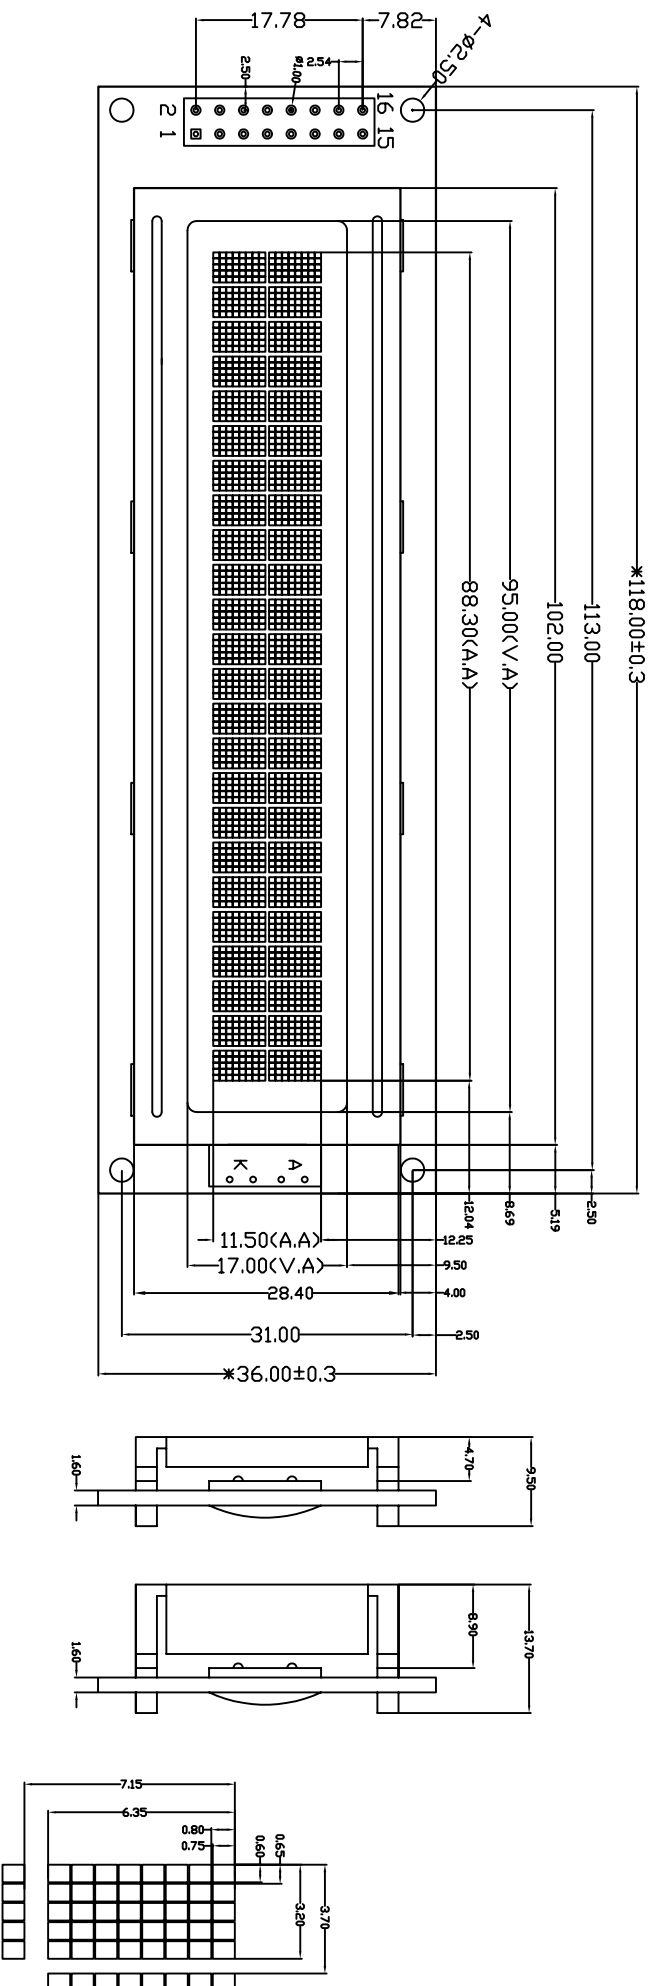

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.7V(Ref), VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/BLUE/NEGATIVE
- 4). Operating temp.: -10°C~+60°C
Storage temp.: -20°C~+70°C
- 5). Controller IC: SPLC780D1(Or Compatible)
- 6). Backlight: Bottom ,Y/G
- 7). Dimensions with mark "*" are important,
with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CONNECTION	VSS	VDD	V0	R/W	RS	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REV	REVISION RECORD	DATE
A0	First issue	11/23



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd

MODEL NO.
模组型号号
SYB2402AV10

GENERAL TOL: ±0.3
未注公差

APPROVED BY
DRAWING BY

PAGE: 1 OF 1
UNIT: mm
三角法

