


Customer approval :

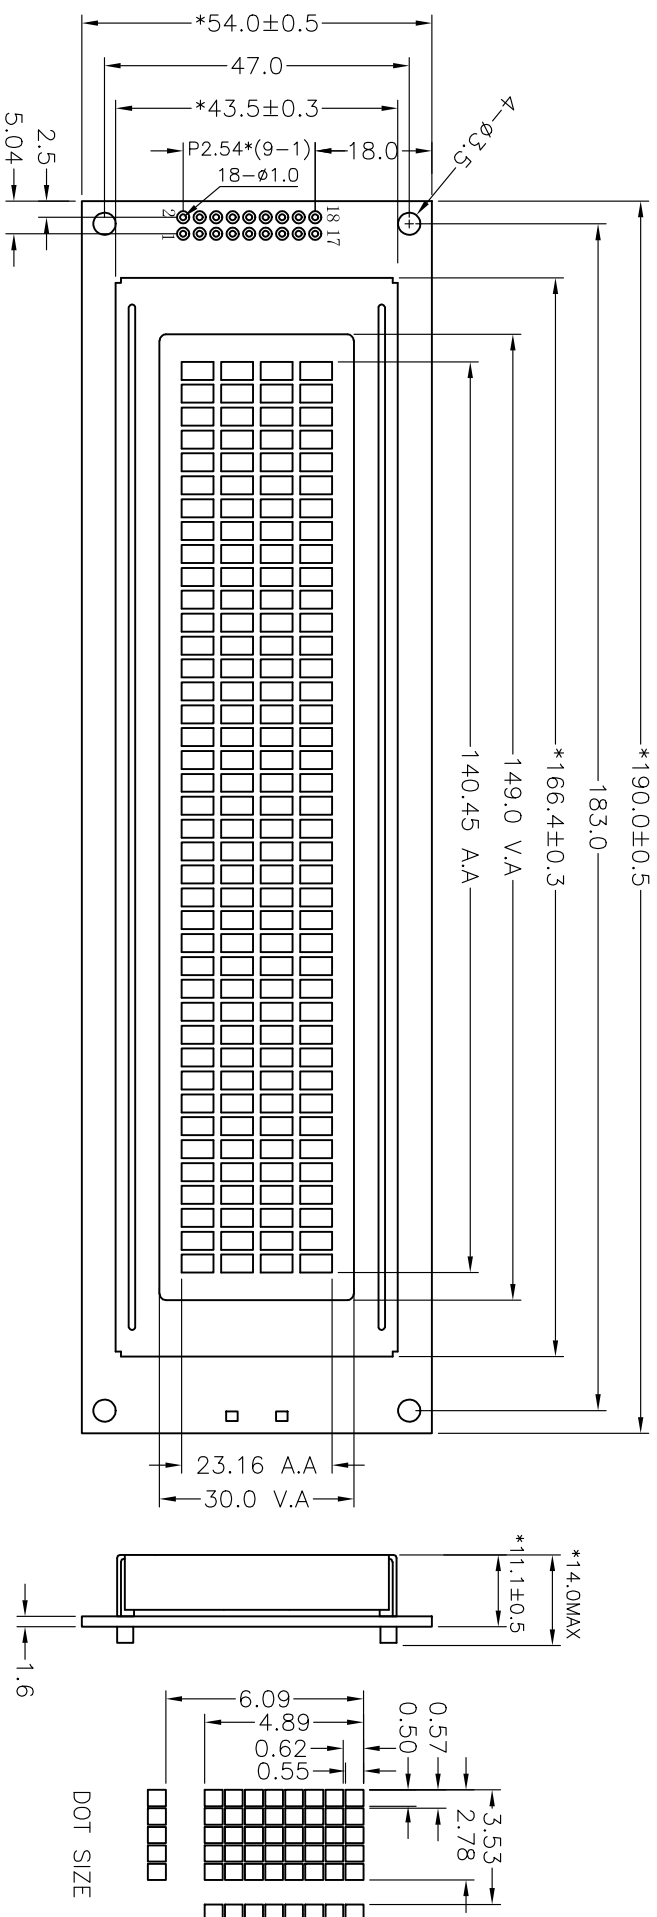

SPECIFICATION:

- 1). Driving: Duty:1/16, Bias:1/5, V_{dd}:5.0V, V_{cd}:4.5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Positive/Transflective/YG
- 4). Operating temp.: 0°C~+50°C
- 5). Storage temp.: -10°C~+60°C
- 6). Control IC: SPLC780D1(Or Compatible)
- 7). BACKLIGHT: Array,YG
- 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 9). All the raw materials are RoHS compliant

NO.	1	2	3	4	5	6	7	8	9
NAME	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E1
NO.	10	11	12	13	14	15	16	17	18
NAME	R/W	RS	V0	VSS	VDD	E2	NC	BLA	BLK

REVISION RECORD	REV
First issue	A0



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd

DRAWING NO.	SYB4004AV21-5C10YL1R-BSNG	GENERAL TOL:	± 0.2
APPROVED BY <td>Liu</td> <td>UNIT: <td>mm</td> </td>	Liu	UNIT: <td>mm</td>	mm
CHECKED BY <td>Francis</td> <td>PAGE <td>1/1</td> </td>	Francis	PAGE <td>1/1</td>	1/1
DRAWING BY <td>Luoxian</td> <td></td> <td></td>	Luoxian		
DATE <td>2012/02/27</td> <td></td> <td></td>	2012/02/27		