

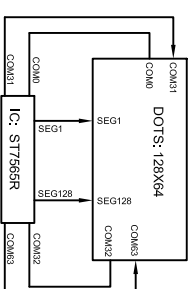
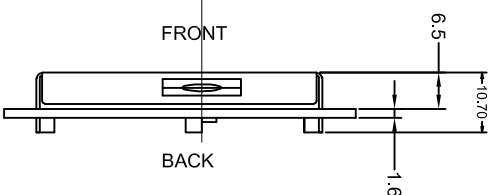
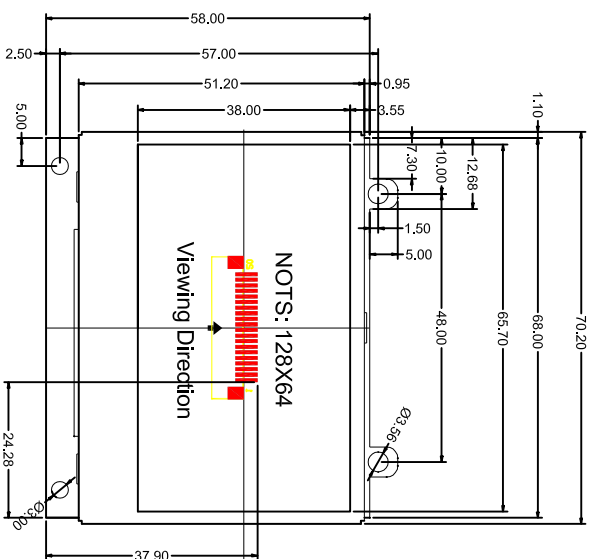


Customer approval :

并口parallel R3=0

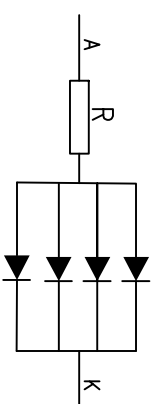

LCD LAYOUT

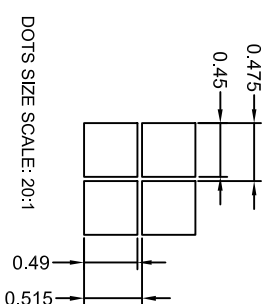

PIN	SYMBOL
1	/CS
2	/RES
3	RS
4	WR
5	RD
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VDD(3.3V)
15	VDD(3.3V)
16	VSS
17	VSS
18	VSS
19	BLA
20	BLK

- Specification:
- 1). Driving: Duty:1/64, Bias:1/9, VLCD=9V, VDD=3.3V
 - 2). Viewing direction: 6 o'clock
 - 3). Display mode:FSTN/POSITIVE /TRANSFLECTIVE
 - 4). Operating temp:-20°C~+70°C
 - 5). Storage temp: -30°C~+80°C
 - 6). Control IC: ST7565R(Or Compatible)
 - 7). Backlight: EDGE White LED: 3.0V 4X15MA
 - 8). dimensions with mark "*" are important
 - 9). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.			
A	FIRST ISSUE	2015/11/03	MODEL NO.	SV/G1286421V1/2-3C33G4LN2R-B7WCP	GENERAL TOL:	±0.3
B			模组型号		未注公差	
C			APPROVED BY	审核	PAGE:	页面 1 OF 1
D			Liu	Francis	DRAWING BY	绘图
			2015/11/03	2015/11/03	PROJECTION	三角法

