

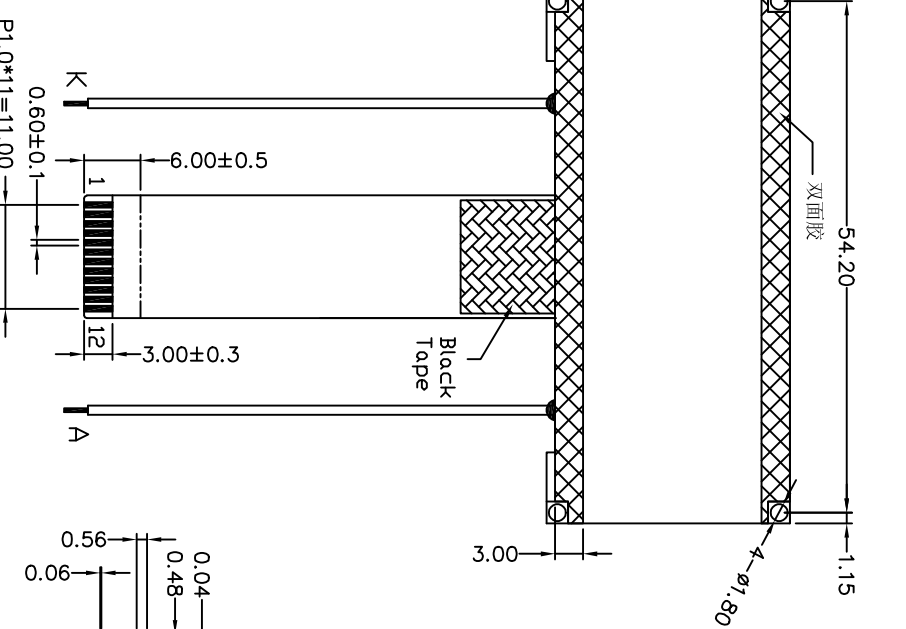


Customer approval :

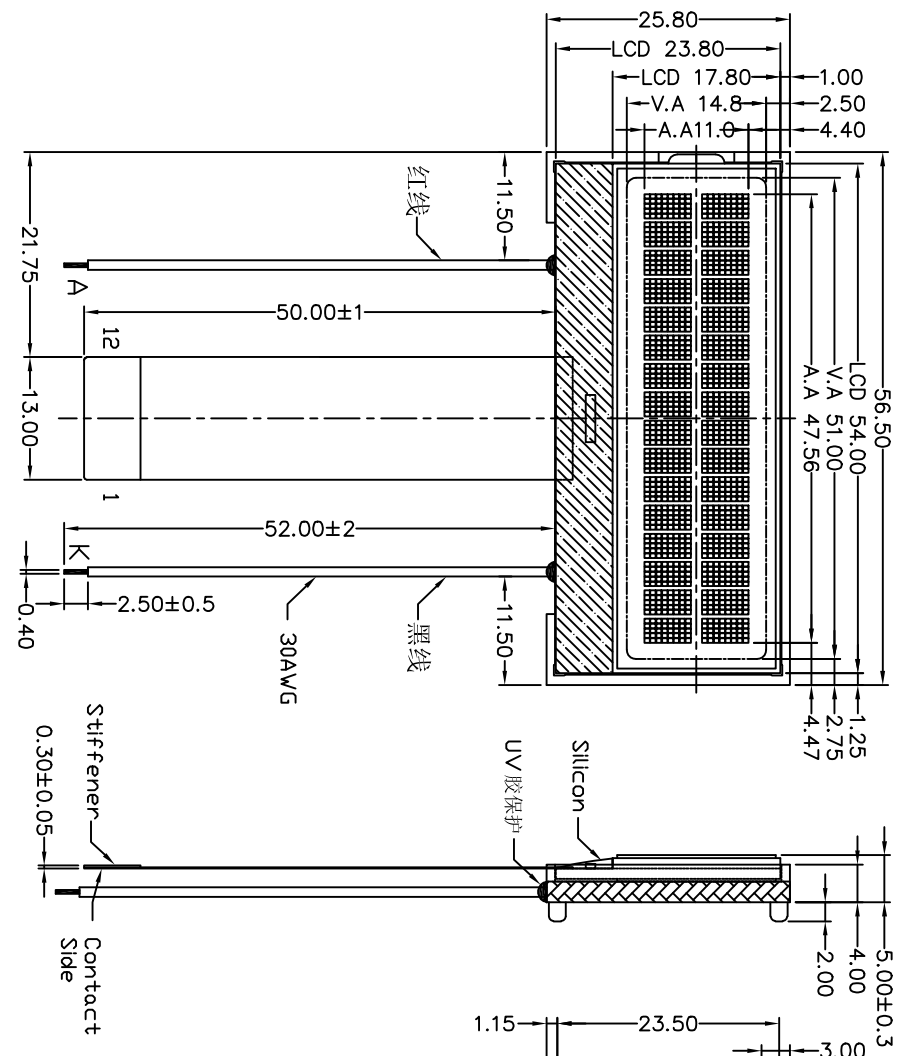

PIN NO.	NAME
1	XRESTE
2	DB6
3	DB7
4	VSS
5	DIRC
6	SHL
7	VDD
8	VIN
9	VDUT
10	CAP1P
11	CAP1N
12	NC



- Specifications:
1. Display Mode: STN/Blue/Transmissite/Negative.
 2. Viewing Angle: 12:00 O'clock.
 3. Drive Method: 1/16 Duty, 1/5 Bias, Vcd=6.0V, VDD=3.3V.
 4. Backlight Type: White, 3.0V, 45mA (3LEDs).
 5. Top: -20°C~+70°C, Tst: -30°C~+80°C.
 6. Connector: COG+FPIC
 7. Drive IC: SPLC792A-002A
 8. Customer P/N: --
 9. With "*" Mark Dimensions Are Important Dimensions.

REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.			GENERAL TOL:
A	FIRST ISSUE	2015/11/03	MODEL NO.	SYG1602A039-3CG2BLN2-BWC	未注公差	±0.3
B			模组型号			
C			APPROVED BY	审核	CHECKED BY	检查
D			Liu	2015/11/03	Francis	2015/11/03
					Luoxian	2015/11/03
					PROJECTION	三角法
					PAGE:	页面 1 OF 1
					UNIT:	单位:mm