




Customer approval :

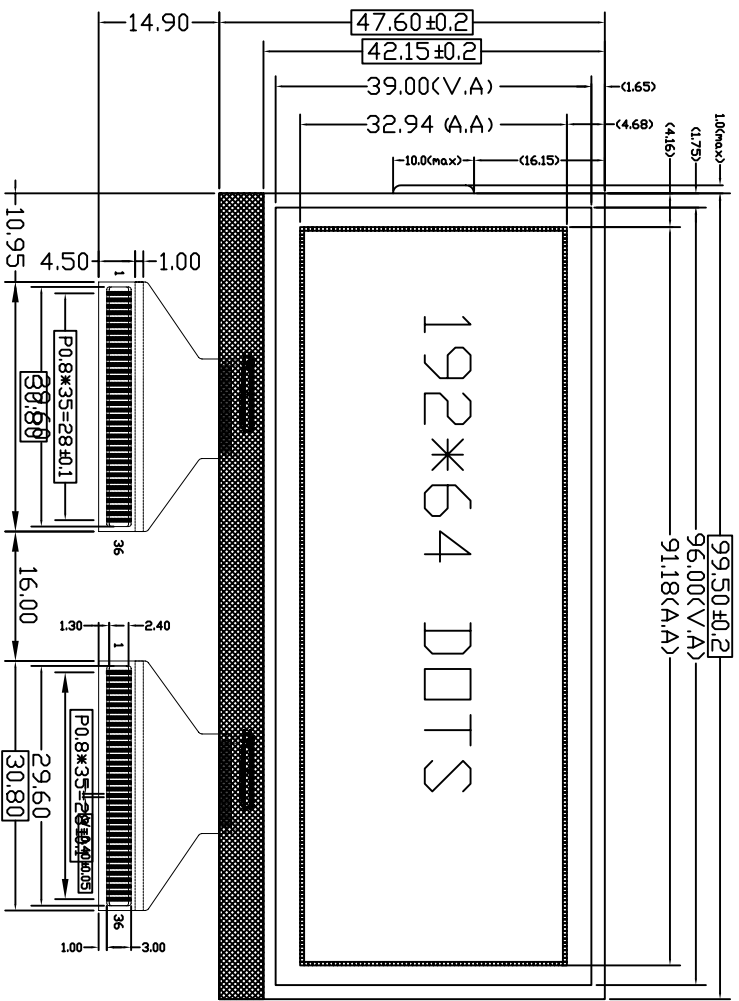

M/S=1:MASTER  
IC1  
M/S=0:SLAVE  
IC2

SPECIFICATION:

- 1). Driving: Dost:192\*64, DUTY:1/65, BIAS:1/9,VDD:3.0V,VO:9.0V
- 2). Viewing angle: 6 0°CLOCK
- 3). Display mode: STN/BLUE/TRANSMISSIVE/NEGATIVE
- 4). Operating temp: -20°C~+70°C  
Storage temp: -30°C~+80°C
- 5). Controller IC: NT7538 (or compatible)
- 6). Backlight: Bottom White
- 7). Dimensions with mark "\*" are important, with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant

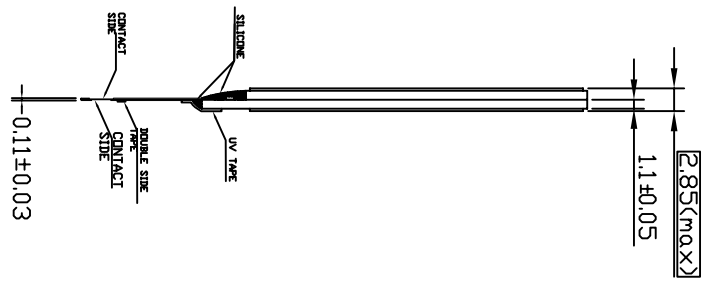

Wiring Dwg

PIN	1	2	3	4	5	6	7	8	9	10	11	12
	NC	IRS	P/S	C86	WR	VO	V4	V3	V2	V1	C2N	C2P
PIN	13	14	15	16	17	18	19	20	21	22	23	24
	C1P	C1N	C3P	C4P	VOUT	VSS	VDD	D7	D6	D5	D4	D3
PIN	25	26	27	28	29	30	31	32	33	34	35	36
	D2	D1	D0	RD	WR	A0	/RES	/CS	/DOF	CL	FR	NC



深圳市三元晶科技有限公司  
Shenzhen TCC LCD Hi-Tech Co., Ltd.

REV	REVISION RECORD	DATE	MODEL NO.	SYG19226401	GENERAL TOL:
A			模组型号		± 0.3
B			APPROVED BY		
C			CHECKED BY		
D			DRAWING BY		
			审核		
			检查		
			绘图		
			Ln		
			2012/12/28		
					投影 三角法
					UNIT: mm
					PAGE: 1 OF 1
					未注公差