




Customer approval :

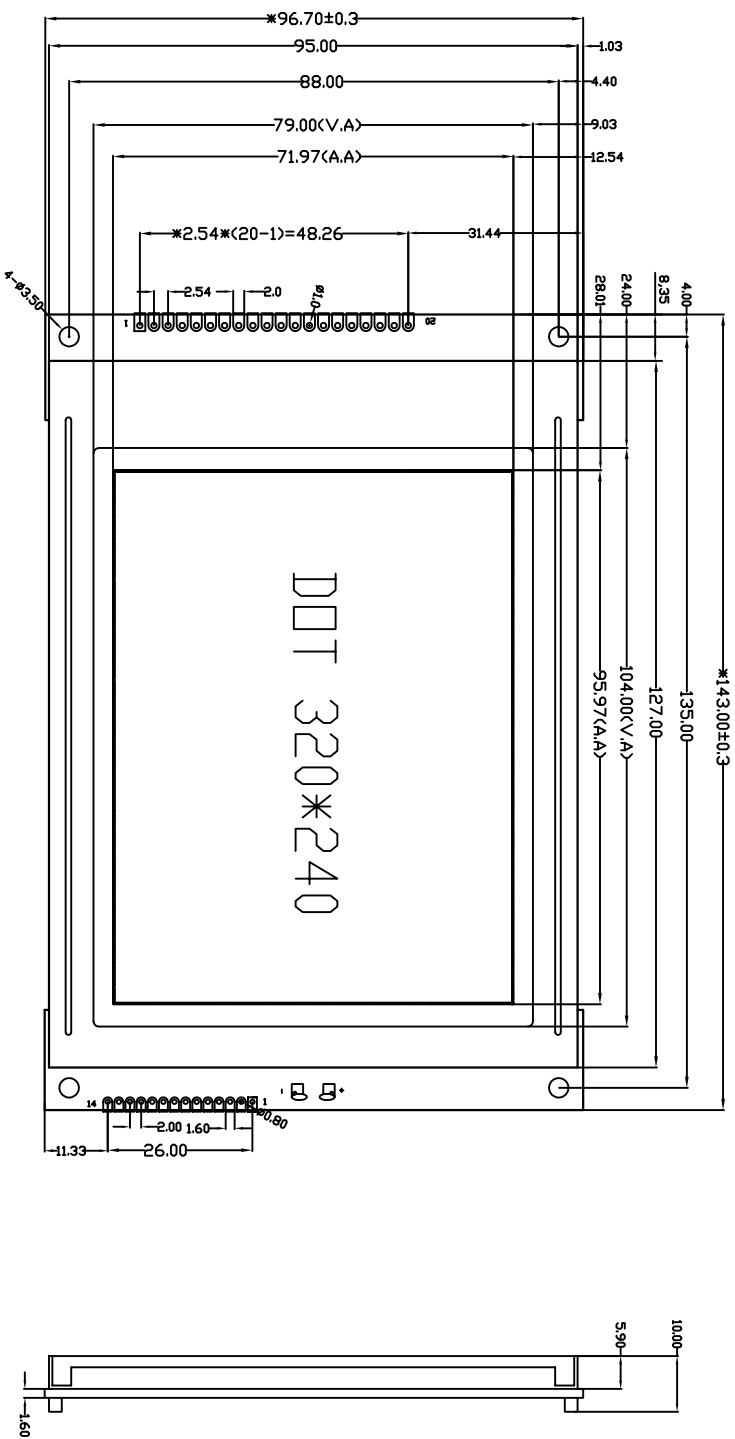

Specification:

- 1). Driving: Dost:320*240, Duty:1/240, Bias:1/16, VDD:5V, VOUT: -21.5V, VO: -18.5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: STN/BLUE/TRANSPARENT/NEGATIVE
- 4). Operating temp.: -10°C - +60°C
Storage temp.: -20°C - +70°C
- 5). Controller IC: RA8835 or NoController
- 6). Backlight: Bottom, White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	FLM	M	CL1	CL2	DISPOFF	DO	D1	D2	D3	VDD	GND	VO	VEE	FGND
PN	1	2	3	4	5	6	7	8	9 ~ 16	17	18	19	20	
CONNECTION	GND	VCC	VO	WR	RD	CS	AO	RST	DB0 ~ DB7	BLA-A	VOUT	BLA-B	BLK	

REV	REVISION RECORD	DATE	OTCC		GENERAL INFO
A0	First Issue	01/15	深圳市三元晶科技有限公司 ShenZhen TTC LCD Hi-Tech Co., Ltd		SYM320240AV11
			MODEL NO. 模组型号		宋廷公 委
			APPROVED BY		PAGE: 1 OF 1
			CHECKED BY		UNIT: mm
			DRAWING BY		PROTECTION 三角法