




Customer approval :

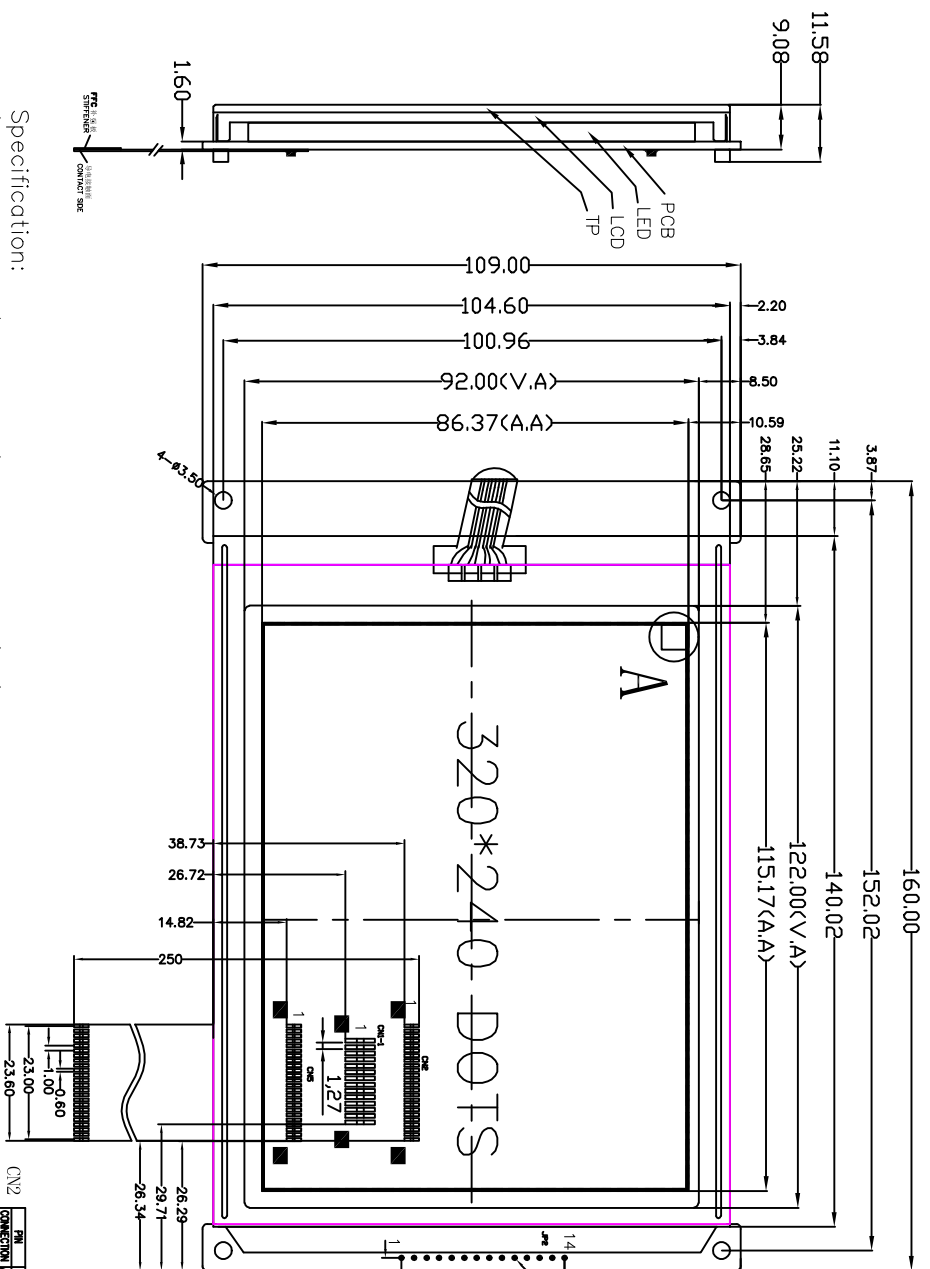

接口, PPG, JP, 背光请选择使用

CN1-1

PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	DO	DI	D2	D3	DISP	FLM	M	LP	CP	VCC	GN0	VOUT	VO	RGND

JP2

PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	DO	DI	D2	D3	DISP	FLM	M	LP	CP	VCC	GN0	VOUT	VO	RGND

CN2

PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
CONNECTION	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES	RES

CN5

PN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
CONNECTION	DO	DI	D2	D3	DISP	FLM	M	LP	CP	VCC	GN0	VOUT	VO	RGND	DI	D2	D3	DISP	FLM	M	NC	NC	NC	NC

Specification:

- 1). Driving: Duty: 1/240, Bias: 1/17, VOUT: -21.5V(Ref), VO: -18.5V, VDD: 5V
- 2). Viewing Direction: 6 O'clock
- 3) Display mode: FSTN/Or(STN/Negative/Transmissive/Blue)
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). Controller IC: RA8835AP3N+TSC2046
- 6). Backlight: White 5V 160ma
- 7). Dimensions with mark "\*" are important, with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE			深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd	
AO	First issue	11/18	MODEL NO.	SYM320240B7V61		GENERAL TOL:
			APPROVED BY	CHECKED BY	DRAWING BY	± 0.3
						PAGE 1 OF 1
						UNIT: mm
						PROTECTION