



Customer approval :

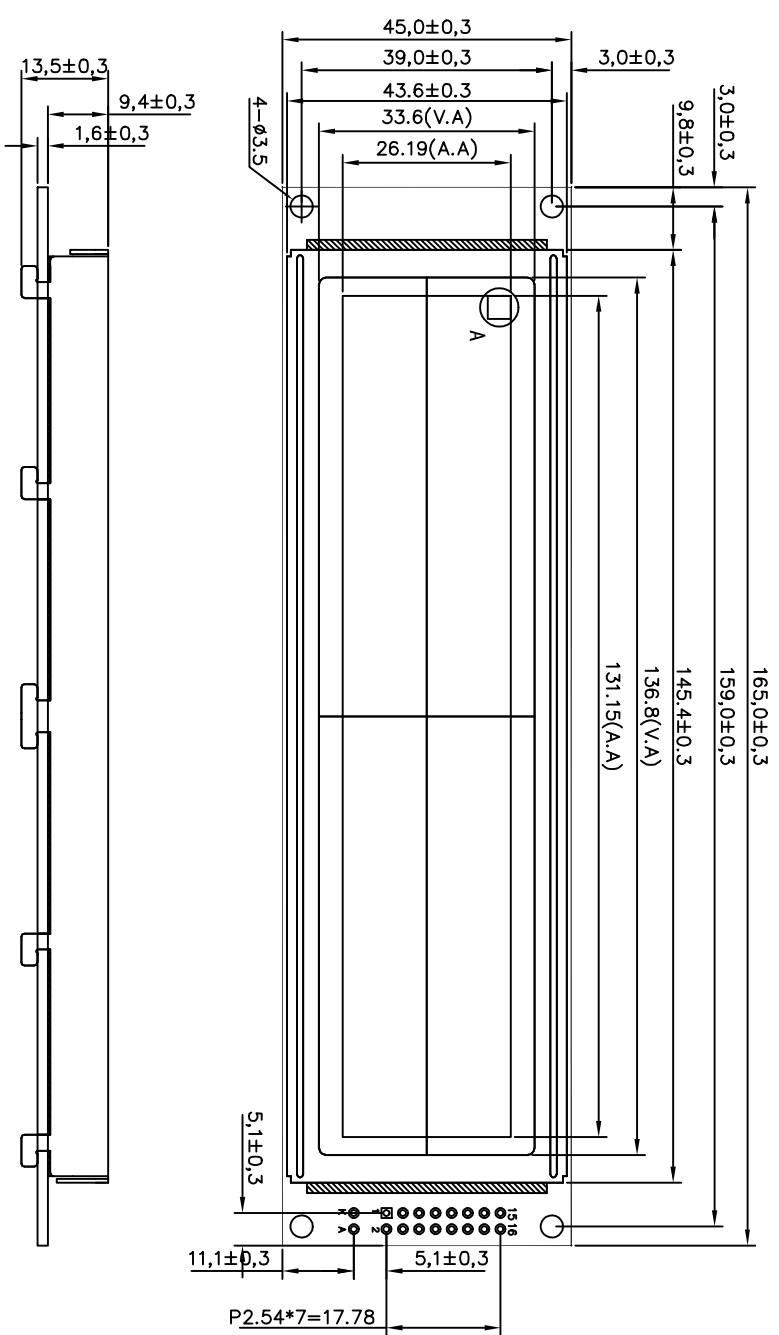

SPECIFICATION:

- 1). Driving: Duty:1/64, Bias:1/9, Vdd:5.0V, Vlcd:-19V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Positive/Transflective/YG
- 4). Operating temp.: 0°C~+50°C
- 5). Storage temp.: -10°C~+60°C
- 6). Control IC: LC7981(Or Compatible)
- 7). BACKLIGHT: Edge,LED Y/G
- 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	~	14	15	16
VSS	VDD	V0	RS	W/R	E	DB0	~	DB7	/CS	/RST

REVISION RECORD		REV	DRAWING NO.		GENERAL TOL:	
First issue	V2.2		SYM32064AV22-5C4YL3R-BENG		± 0.2	
			APPROVED BY	CHECKED BY	DRAWING BY	UNIT:
			Liu	Francis	Luoxian	mm
			2012/02/27	2012/02/27	2012/02/27	
			TCC		PAGE	
			深圳市三元鼎科技有限公司		1/1	
			ShenZhen TCC LCD Hi-Tech Co., Ltd			